


4AMC

Value for
Money
Model

The reliable solution to
your carton sealing needs

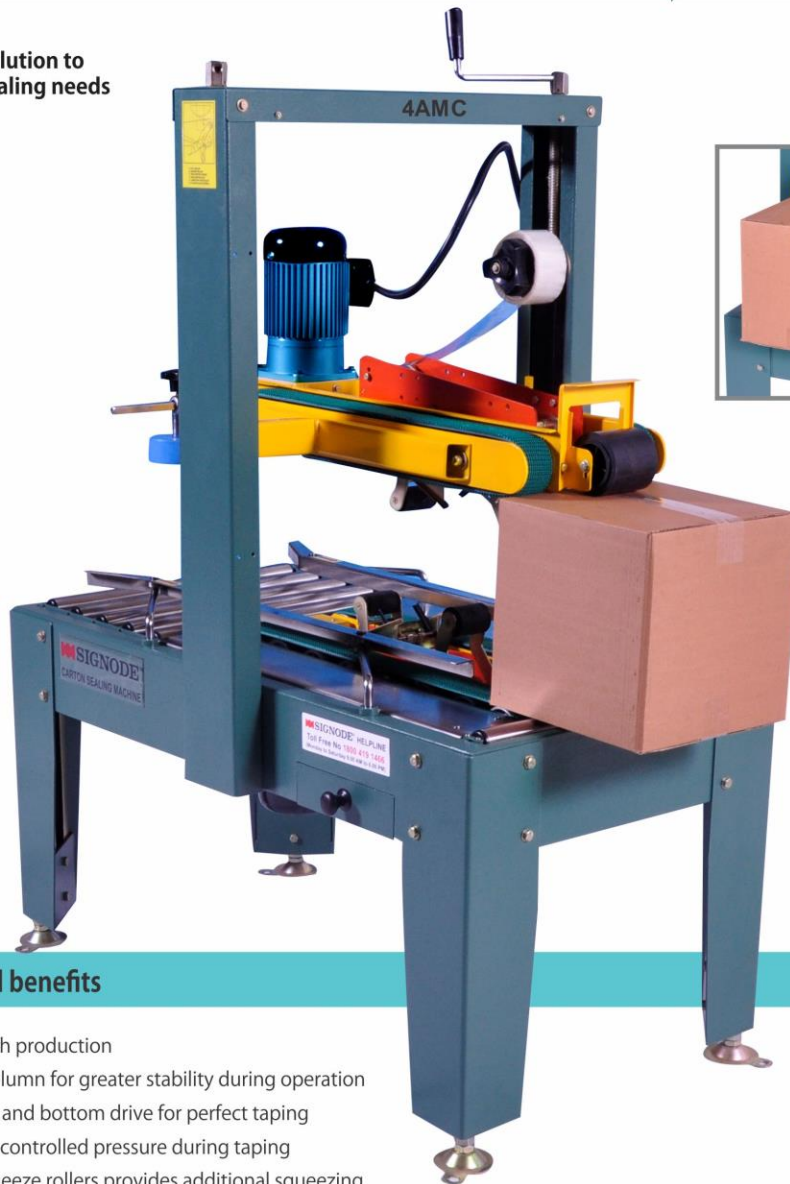

Features and benefits

- Ideal for batch production
- Twin mast column for greater stability during operation
- Separate top and bottom drive for perfect taping
- Uniform and controlled pressure during taping
- Twin flap squeeze rollers provides additional squeezing for perfect top flaps alignment
- Belt speed of 20 m/minute .
- Inbuilt tool box
- Self-centering side guides for accurate centering
- Positive top and bottom drive to ensure sealing of tall and heavy cartons, in addition to regular cartons

SIGNODE[®]
Your partner in industrial packaging world wide

4AM C



Semi automatic case sealer

Technical data

Machine Specification

4AM C

Taping Head	Standard (2"/2.5"/3")
Length	1080 mm
Width	570 mm
Height	1460 mm
Weight	143 Kg
Color	RAL 6000 & RAL 1021 Yellow (Moving Parts)
Drive motor	0.25 HP, 2 No.
Belt speed	20 Metres/ Min
Machine Throughput	Belt speed/ (Carton length+280 mm)

Utility Requirements

Air requirement	NA
Air consumption	NA
Power Supply	230 V AC , 1Phase , 50/Hz
Power consumption	0.4KW
Tap roll length	65 M / 650 M/ 1000 M

Case Dimensions

Length	150 mm - Un Limited
Width	160 mm -450 mm
Height	100 mm -550 mm
Weight	2- 40 Kg
Carton ply	Min 3 Ply

 **SIGNODE®**

Your partner in industrial packaging world wide

E : info@signodeindia.com

W : www.signodeindia.com



Toll Free Number for Services 1800 419 1466

Signode has a policy of continuous product development and reserves the right to alter specifications at any time without prior notice